


PRODUCT DATA SHEET UNIVERSAL PIPE CLIP

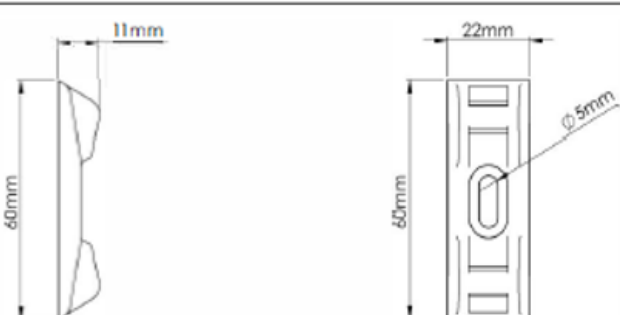

SIZE: 100mmØ-150mmØ		SPECIFICATION DETAILS The UNIVERSAL-PIPE-CLIP is manufactured from polypropylene. It is secured to the floor slab/ joist using the predetermined screw fixing using a screw. The cable tie is inserted into the UNIVERSAL-PIPE-CLIP and the ducting is secured using the cable tie. Rigid Duct must be adequately supported and it is recommended at least every 750mm and either side of a connector. UNIVERSAL-PIPE-CLIP is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and should meet UL94HB flammability standard. UNIVERSAL-PIPE-CLIP has been designed for use with 100mmØ-150mmØ Round Ducting.	
FOR USE WITH:	ROUND		
INDIVIDUAL WEIGHT:	5g		
MIN OPERATING TEMP	-15°C		
MAX OPERATING TEMP	+60°C		
AIRFLOW	RESISTANCE		
8 l/s	N/A pa		
13 l/s	N/A Pa		
21 l/s	N/A Pa		
30 l/s	N/A Pa		
60 l/s	N/A Pa		
120 l/s	N/A Pa		