


ducting express

Express Duct T-Piece 45deg

	MAIN DUCT DIA (DA) mm	80	100	125	150	160	180	200	224	250	280	300	315	350	400	450	500	
SADDLE DIA (DB) mm	Branch Length (BL)mm																	
80	90	275	275	275	275	275	275	275	275	315	315	315	315	315	355	355	355	
100	90		305	305	305	305	305	305	305	345	345	345	345	345	385	385	385	
125	90			343	343	343	343	343	343	383	383	383	383	383	423	423	423	
150	90				380	380	380	380	380	420	420	420	420	420	460	460	460	
160	90					395	395	395	395	435	435	435	435	435	475	475	475	
180	90						425	425	425	465	465	465	465	465	505	505	505	
200	90							455	455	495	495	495	495	495	535	535	535	
224	90								491	531	531	531	531	531	571	571	571	
250	110									570	570	570	570	570	610	610	610	
280	110										615	615	615	615	655	655	655	
300	110											645	645	645	685	685	685	
315	110			OVERALL LENGTH (L)mm										668	668	708	708	708
350	110													720	760	760	760	
400	130														835	835	835	
450	130															910	910	
500	130																985	

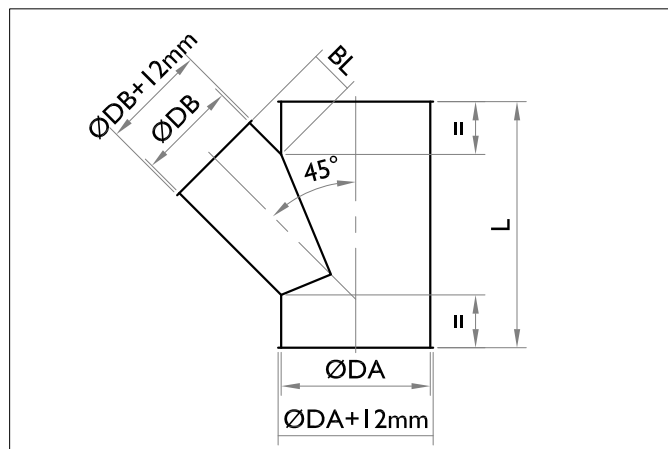

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.