


ducting express

Express Duct Cut in Collar Saddles 45 degree

	MAIN DUCT DIA (DA) mm	80	100	125	150	160	180	200	224	250	280	300	315	350	400	450	500
SADDLE DIA (DB) mm																	
80		90	90	90	90	90	90	90	90	110	110	110	110	110	130	130	130
100			90	90	90	90	90	90	90	110	110	110	110	110	130	130	130
125				90	90	90	90	90	90	110	110	110	110	110	130	130	130
150					90	90	90	90	90	110	110	110	110	110	130	130	130
160						90	90	90	90	110	110	110	110	110	130	130	130
180							90	90	90	110	110	110	110	110	130	130	130
200								90	90	110	110	110	110	110	130	130	130
224									90	110	110	110	110	110	130	130	130
250										110	110	110	110	110	130	130	130
280											110	110	110	110	130	130	130
300												110	110	110	130	130	130
315													110	110	130	130	130
350														110	130	130	130
400															130	130	130
450																130	130
500																	130

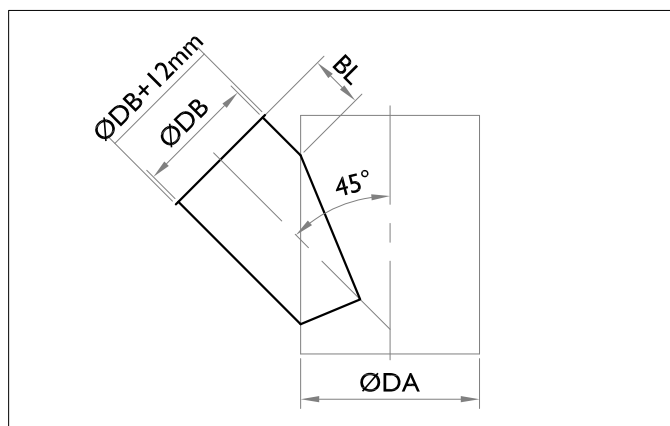

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.