


ducting express Ltd

Clipped galvanized Steel spart Traps						
Express Duct	Duct Work Construction to DW/144					
	Length	Internal \emptyset	Over Turnout	Diameter	Galvanised Steel	
Spark Trap	A	B	C	D		
100 \emptyset	450mm	103mm	112mm	180mm	0.8mm	Express Q- Clip
125 \emptyset	480mm	128mm	137mm	224mm	0.8mm	Express Q- Clip
150 \emptyset	520mm	153mm	162mm	280mm	0.8mm	Express Q- Clip
160 \emptyset	520mm	163mm	172mm	300mm	0.8mm	Express Q- Clip
180 \emptyset	600mm	183mm	192mm	350mm	0.8mm	Express Q- Clip
200 \emptyset	600mm	203mm	212mm	350mm	0.8mm	Express Q- Clip
224 \emptyset	600mm	227mm	236mm	400mm	0.8mm	Express Q- Clip
250 \emptyset	600mm	253mm	262mm	400mm	0.8mm	Express Q- Clip
280 \emptyset	660mm	283mm	292mm	450mm	0.8mm	Express Q- Clip
300 \emptyset	660mm	303mm	312mm	450mm	0.8mm	Express Q- Clip
315 \emptyset	660mm	318mm	327mm	500mm	0.8mm	Express Q- Clip
350 \emptyset	700mm	353mm	362mm	560mm	0.8mm	Verroloc Flange
400 \emptyset	750mm	403mm	412mm	630mm	0.8mm	Verroloc Flange
450 \emptyset	810mm	453mm	462mm	710mm	0.8mm	Verroloc Flange
500 \emptyset	920mm	503mm	512mm	800mm	0.8mm	Verroloc Flange

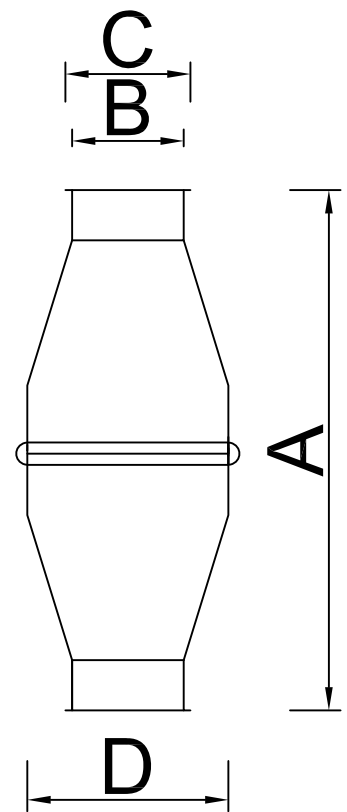

www.ducting-express.co.uk

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.