


ducting express

Express Duct Flange to Flex Quick Release Adapter

Diameter (D) mm	End Piece (EP) mm	Outside Diameter (OD)mm	PCD mm	Quantity and Diameter of holes (H)mm	Overall Length (L)mm
80	40	133	111	4 x Ø10	140
100	40	153	131	4 x Ø10	140
125	40	178	156	4 x Ø10	140
150	40	213	189	8 x Ø10	140
160	40	223	199	8 x Ø10	140
180	40	243	219	8 x Ø10	140
200	40	283	251	8 x Ø12	140
224	40	307	276	8 x Ø12	140
250	60	333	302	8 x Ø12	160
300	60	383	352	12 x Ø12	160

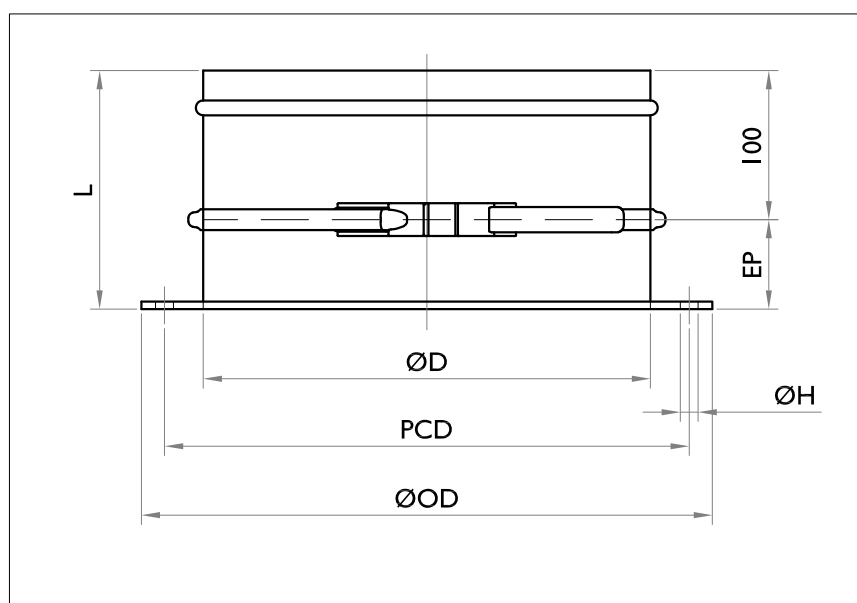

Designed to provide a smoother internal bore & simply clip the components together, Express Duct will save time on installation & make replacing parts simple. This ducting can be easily dismantled for cleaning purposes & replacing worn parts. The use of the quick clamps reduces leakage, this results in improved airflow.