


Exhaust Arm - Art. No.:79 002

- » Flexible operation
- » Large capture area

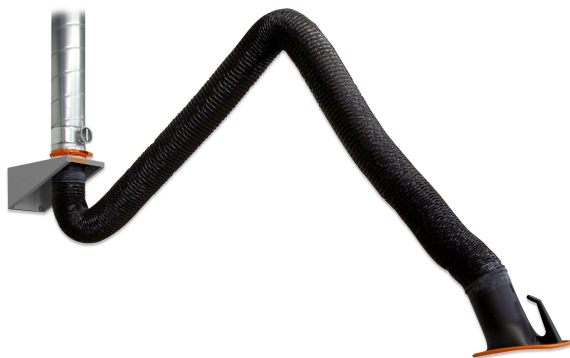

Technical Data

Art. No	79 002
Basic data	
Weight	17 kg
Additional information	
Exhaust arm type	flexible exhaust arm
Length of exhaust arm	2 m
Joints	1

Applications

- » For connection to fans or central extraction systems
- » High levels of smoke and dust
- » Non-stop operation
- » Welding fumes, gases, vapours, light dusts, car exhaust fumes

Benefits

- » Fast operation due to particularly flexible adjustment
- » 40% less adjustment of the exhaust arm needed due to exhaust hood design
- » User-friendly due to particularly smooth movement of the hood with one hand
- » Arm keeps position due to self-supporting design
- » Due to its easy movement, the exhaust arm can be brought into any permanent position with one hand
- » Various options to connect the exhaust arms to fans, stationary devices or via duct work to central extraction and filtration systems


Properties

- » 360 degrees rotating exhaust hood with damper
- » Self-supported by internal springs

Scope of supply

- » Exhaust arm with hood
- » Wall bracket

Pressure loss

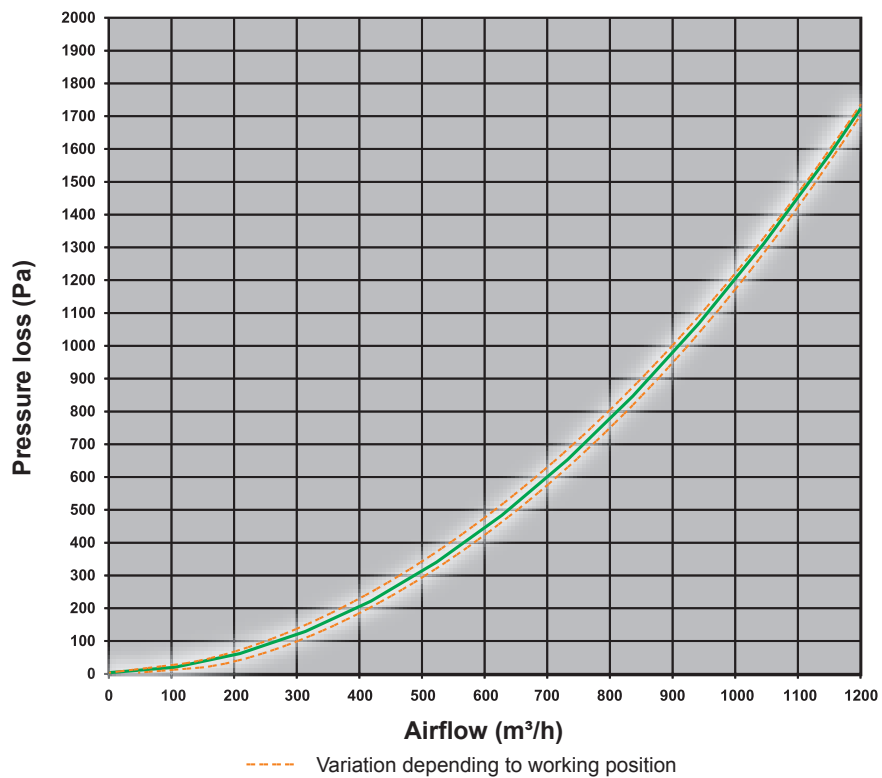

Dimensions

